



29.00M Twin Screw Vessel
2 x 1200BHP Cummins

PRINCIPAL PARTICULARS

Length Overall : 29.00M
Length BP : 27.09M
Breath Moulded : 8.60M
Depth Moulded : 4.12M
Draft Moulded : 3.50M
Class : NK
Notation : Tug
Gross Tonnage : 248 tons
Nett Tonnage : 75 tons
Speed : 10.0 knots (approx)

TANKAGE

Fresh water : 57 tons
Fuel oil : 179 tones

MACHINERY

Main engine : 2 x 1200BHP @ 1800RPM
Cummins KTA38-M2
Reduction gear : Twin Disc MG5321, 5.96:1
Propeller : 2 x 4 blade manganese bronze FPP
Main generator : 2 x 78kw Cummins 6BT5-9-D (M), 415/3/50

ACCOMMODATION

For 10 men with 2 cabins for Captain and Chief Engineer, 4 x two-man cabin

DECK MACHINERY


Anchor : 2 x stockless bower anchors of 480kg each
Anchor windlass : 1 x hydraulic anchor windlass 19mm
Towing winch : 1 x hydraulic towing winch of 25 tons. (Wire rope to be supplied by buyer)

NAVIGATION EQUIPMENT

1 set SSB radiophone
1 set VHF
1 set Echo Sounder
1 set radar
1 set GPS Navigator
1 set EPIRB
2 set Walkie-talkie

LIFE SAVING EQUIPMENT

2 x 10 men Liferaft
10 x 30" sets Life buoy
18 sets lifejackets

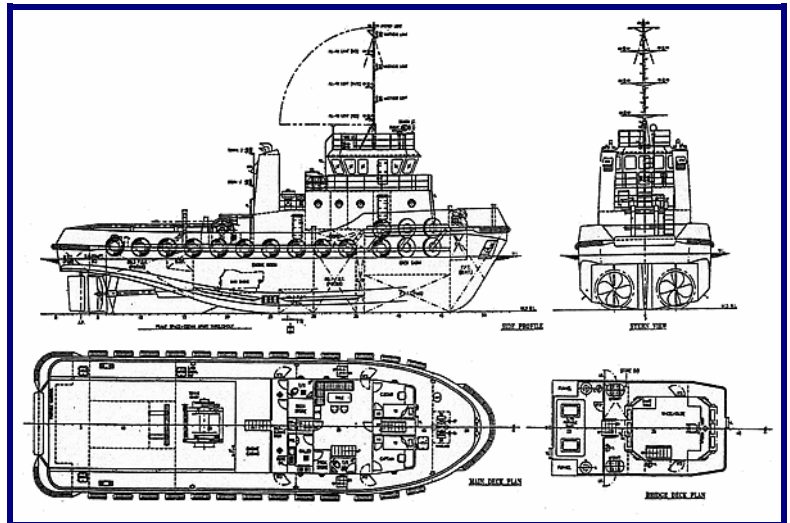

Pictures may be of sisterships.

PUMPS

F.O. pump : 2 units
F.W. pump : 2 units
Bilge, Ballast / fire pump : 1 unit
G.S. pump : 2 units
Sewage treatment plant : 12 men
Oily water separator : 1 x 0.25M³

Contents herein are believed correct but not guaranteed.